






999.00 EUR  
incl. 19% VAT, plus [shipping](#)

- 2cm height !
- Mini-PCI Express !
- Hyper-Threading !
- 10-19VDC Input !

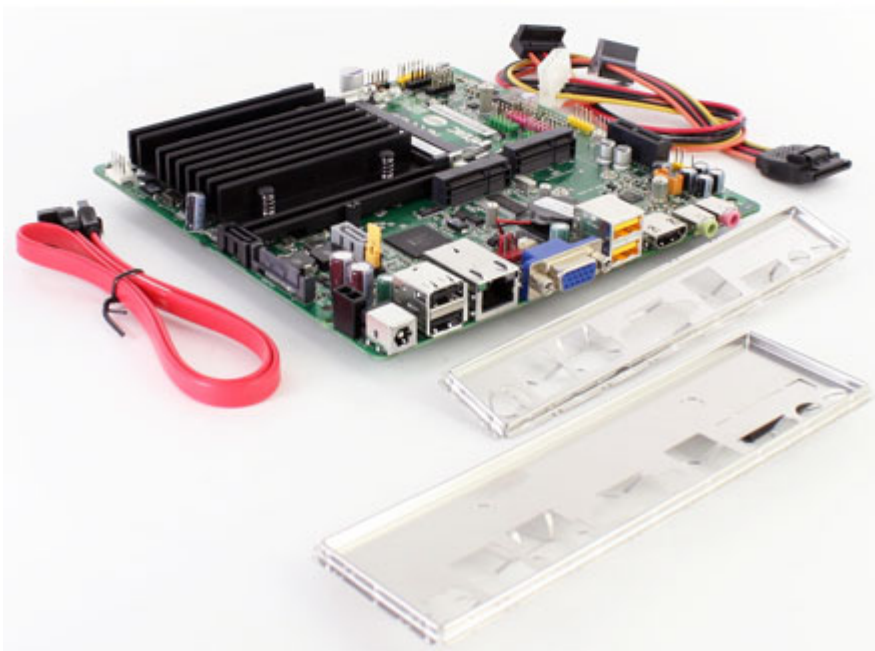

**Support:**  [Specifications](#) |  [Manual \[EN\]](#) | [Drivers](#)

This board is produced by MITAC, the OEM producer of Intel DN2800MT. This board is identical with Intel DN2800MT (even BIOS-compatible) and available until at least 2018.

- Successor model of Intel D945GSEJT mainboard
- Dual-core Atom with Hyper Threading

- Slim form factor; <20mm z-height
- Meets channel All-In-One specification
- ExpressCard/34 adapter option (mobile ecosystem compatibility) via PCIe mini Card
- Supports new Mobile SATA (SSD) card via full-length PCIe Mini Card
- Supports Z-U130 flash drive
- Wide-range (10-19V) input voltage tolerance
- High current rating (up to 1.3A) on two back-panel USB ports

Name	Mitac PD11TI (Intel DN2800MT-E)
Form Factor	Mini-ITX Mainboard
CPU	Intel® Atom™ N2800 (2x 1.86GHz) 1MB Cache, With Hyper-Threading
Chipset	Intel NM10 Express
Graphics	VGA + HDMI + LVDS + eDP
Memory	2x SO-DDR3 800/1066, 4GB max, Single channel
LAN	1x Intel 10/100/1000 MBit
Connectors (rear)	- 4x USB 2.0 (2x with High-Current 1.3A) - 1x LAN RJ-45 - 2x Audio - 1x HDMI - 1x VGA - 1x DC-In (10-19V)
Audio	2+2 Channel HD Audio
Connectors (internal)	- 2x SATA-II (3GB/s) - 4x USB 2.0 - 1x PCIe - 2x Mini-PCIe - Front Audio - SPDIF - 1x LPT - 2x RS232 - LVDS (Dual 24bit) - eDP (4-lane 24bit) - Z-U130 Flash Drive support - Mobile SATA (SSD) support via Mini-PCIe - ExpressCard/34 support via Mini-PCIe
Included	- Mitac PD11TI (DN2800MT-E) Mainboard (with 2x 1.86Ghz Atom CPU) - I/O ATX rear plate (Thin + Standard) - 1x SATA cable

**Note :**

- If you do not get picture on DSUB-15 VGA, then press CTRL+ALT+F1